


Wire-wound Chip Inductors – Open Wound

ginvanix.com


GVA & GVB Series

From 2.5 nH to 43 nH

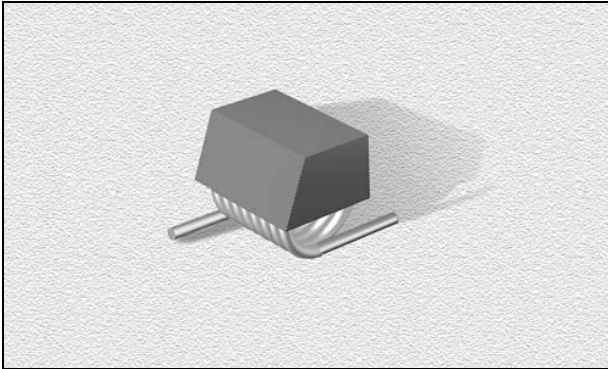

PHYSICAL DIMENSIONS

GVA SERIES					
Size	A	B	C	D	E
mm	3.05	3.18	0.58±0.38	3.68	2.92±0.25
inches	0.12	0.125	0.023±0.015	0.145	0.115±0.01
GVB SERIES					
Size	A	B	C	D	E
mm	3.05	3.18	0.58±0.38	6.86	5.84±0.25
inches	0.12	0.125	0.023±0.015	0.270	0.230±0.01

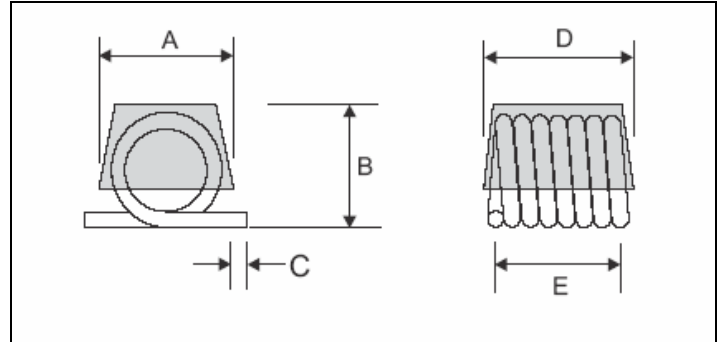

CHARACTERISTICS

Description: SMD air core “spring” inductor
Applications: Designed to operate a wide frequency range application. Also designed to operate in high Q applications.
Operating Temperature: -40°C to +85°C
Inductance Tolerance: ±2%, ±5%, ±10%,
Testing: Inductance is tested on an HP4286A at 150 MHz
Packaging: Tape & Reel
Tape Size: 12 mm wide GVA series, 16 mm wide GVB series
Miscellaneous: RoHS Compliant available.
Additional Information: Additional electrical & physical information available upon request
Samples available. See website for ordering information.

SPECIFICATIONS


Please specify tolerance code when ordering.
 GVA03T_ ← G = ±2%, J = ±5%, K = ±10%
 * = J or K Tolerance only.

GVAE / GVB E Please specify “F” for RoHS compliant

Part Number	Inductance (nH)	# Of Turns	Q Fact. Min.	SRF (GHz)	DCR Max. (mΩ)	IDC Max. (A)
GVA_01TK	2.5	1	145	12.5	1.1	4
GVA_02T_*	5.0	2	140	6.5	1.8	4
GVA_03T_	8.0	3	140	5.0	2.6	4
GVA_04T_	12.5	4	137	3.3	3.4	4
GVA_05T_	18.5	5	132	2.5	3.9	4
GVB_06T_	17.5	6	100	2.2	4.5	4
GVB_07T_	22.0	7	102	2.1	5.2	4
GVB_08T_	28.0	8	105	1.8	6.0	4
GVB_09T_	35.5	9	112	1.5	6.8	4
GVB_10T_	43.0	10	106	1.2	7.9	4

PAD LAYOUT

GVA SERIES					
Size	A	B	C	D	E
mm	3.3	2.79	4.19	1.65	1.27
inches	0.13	0.11	0.165	0.065	0.05
GVB SERIES					
Size	A	B	C	D	E
mm	3.3	2.79	7.24	4.7	1.27
inches	0.13	0.11	0.285	0.185	0.05

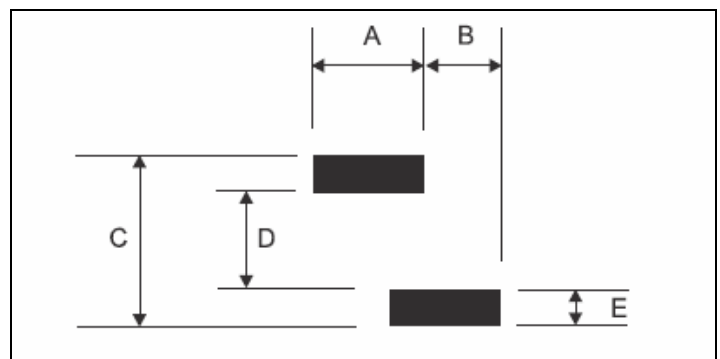

Ginvanix Electronics Corp.

180, Minsheng St., 303, Hukou, Hsinchu, Taiwan
 Tel: +886-3-5999899; Fax: +886-3-5901484; info@ginvanix.com