

GVCDR63B Series

From 10 μH to 68 μH


SPECIFICATIONS

Part numbers indicate tolerance available.

L = $\pm 15\%$, M = $\pm 20\%$

GVCDR63BE Please specify "F" for RoHS compliant

*Inductance drop = 10% typ. at IDC

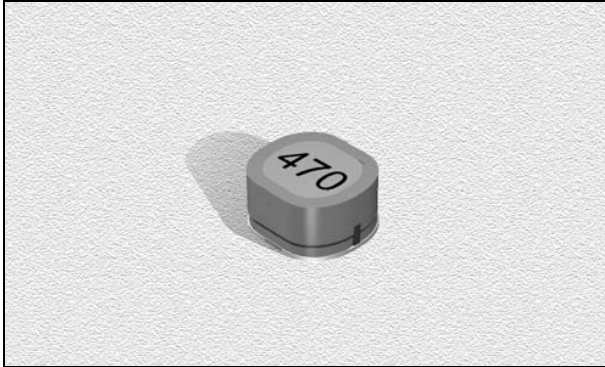

Part Number	Inductance (μH)	L Test Freq. (MHz)	DCR Max. (Ω)	IDC Max. (A)
GVCDR63B_-100M	10	2.52	0.14	1.00
GVCDR63B_-120M	12	2.52	0.16	0.94
GVCDR63B_-150M	15	2.52	0.18	0.86
GVCDR63B_-180M	18	2.52	0.25	0.78
GVCDR63B_-220M	22	2.52	0.32	0.76
GVCDR63B_-270M	27	2.52	0.36	0.64
GVCDR63B_-330L	33	2.52	0.41	0.61
GVCDR63B_-390L	39	2.52	0.47	0.53
GVCDR63B_-470L	47	2.52	0.51	0.50
GVCDR63B_-560L	56	2.52	0.72	0.46
GVCDR63B_-680L	68	2.52	0.82	0.42

PHYSICAL DIMENSIONS

Size	A	B	C	D
	Max.	Max.	Max.	Ref.
mm	5.9	6.5	3.5	1.45
inches	0.23	0.26	0.14	0.06

CHARACTERISTICS

Description: SMD shielded power inductor

Applications: VTR power supplies, OA equipment, LCD televisions, PC notebooks, portable communication equipment, DC/DC converters

Operating Temperature: -40°C to $+85^{\circ}\text{C}$

Inductance Tolerance: $\pm 15\%$, $\pm 20\%$

Testing: Inductance is tested on an HP4285A at 2.52MHz


Packaging: Tape & Reel

Marking: Marked with inductance code

Miscellaneous: RoHS Compliant available.

Additional Information: Additional electrical & physical information available upon request

Samples available. See website for ordering information.

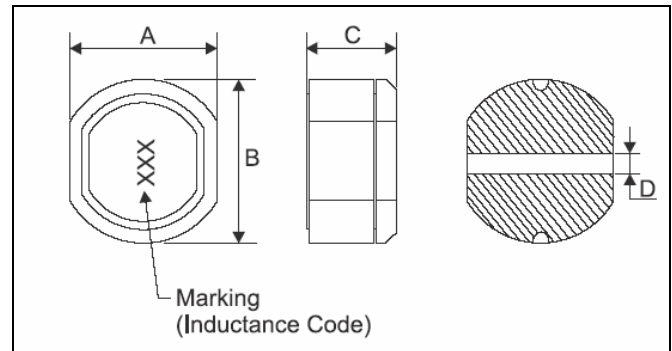

PAD LAYOUT

