


GVDO5022HC Series

From 0.78 μH to 15 μH

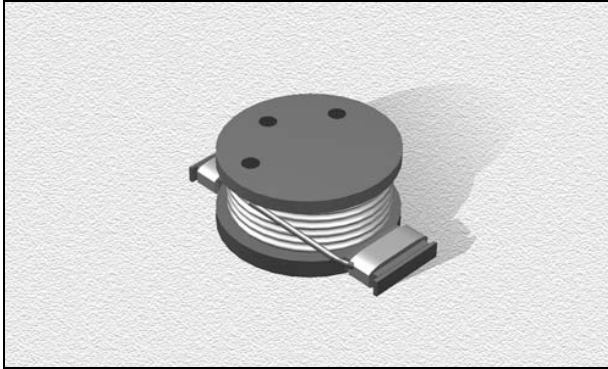

SPECIFICATIONS

Parts are available in $\pm 20\%$ tolerance only.
 GVDO5022PE Please specify "F" for RoHS compliant

Part Number	Inductance (μH)	L Test Freq. (kHz)	DCR Max. ($\text{m}\Omega$)	SRF Typ. (MHz)	Isat Typ. (A)	Irms (A)
GVDO5022P_-781HC	0.78	100	2.6	156	30	15
GVDO5022P_-152HC	1.5	100	4.0	100	25	15
GVDO5022P_-222HC	2.2	100	6.1	75	20	12
GVDO5022P_-332HC	3.3	100	8.6	60	17	10
GVDO5022P_-392HC	3.9	100	10	55	15	9.0
GVDO5022P_-472HC	4.7	100	14	40	13	8.4
GVDO5022P_-602HC	6.0	100	17	35	12	7.5
GVDO5022P_-782HC	7.8	100	18	35	11	7.5
GVDO5022P_-103HC	10	100	26	28	10	6.0
GVDO5022P_-153HC	15	100	32	20	8.0	4.4




PHYSICAL DIMENSIONS

Size	A	B	C	D
	Max.	Typ.	Max.	Max.
mm	16.26	12.7	8	22.35
inches	0.64	0.5	0.32	0.88

CHARACTERISTICS


- Description:** SMD (high current) power inductor
- Applications:** DC/DC converters, computers, LCD displays, telecommunication equipment and PDA palm tops.
- Operating Temperature:** -40°C to $+85^{\circ}\text{C}$
- ΔT : 40°C typically at I_{rms}.
- Inductance Tolerance:** $\pm 20\%$
- Inductance Drop:** 10% typically at Isat.
- Testing:** Inductance is tested on an HP4285A at 100 kHz.
- Packaging:** Tape & Reel.
- Marking:** Color dots OR Inductance code.
- Miscellaneous:** RoHS Compliant available.
- Additional Information:** Additional electrical & physical information available upon request.
- Samples available.** See website for ordering information.

Parts will be marked with Significant Digit Dots OR Inductance Code

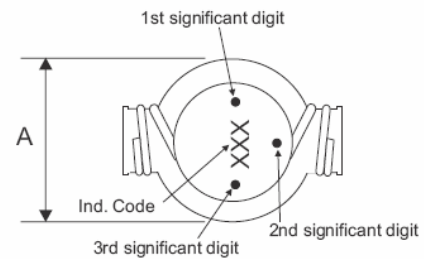

PAD LAYOUT

Unit: mm

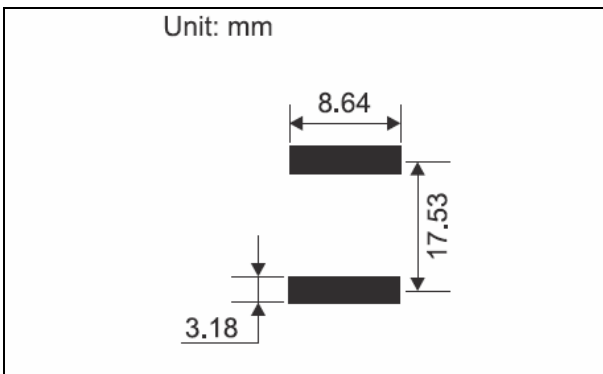

Ginvanix Electronics Corp.

180, Minsheng St., 303, Hukou, Hsinchu, Taiwan
 Tel: +886-3-5999899; Fax: +886-3-5901484; info@ginvanix.com