


GVDS1608 Series

From 1.0 μH to 10,000 μH

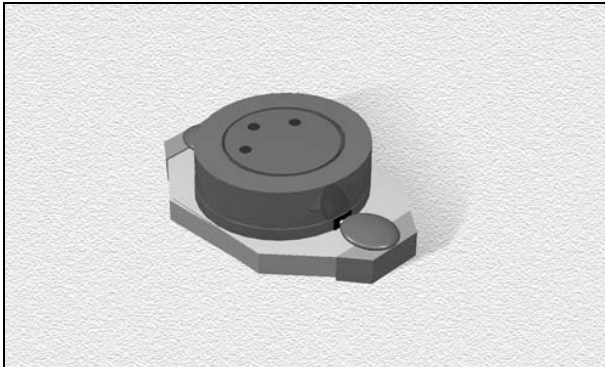

CHARACTERISTICS

Description: SMD (shielded) power inductor

Applications: DC/DC converters, computers, LCD displays and telecommunication equipment. Can help achieve significantly longer battery life in hand held communication devices and other portable products

Operating Temperature: -40°C to +85°C

Inductance Tolerance: $\pm 20\%$

Testing: Inductance and Q are tested on an HP4285A at 100 kHz

Packaging: Tape & Reel


Marking: Color dots OR Inductance code

Miscellaneous: RoHS Compliant available. Magnetically shielded

Additional Information: Additional electrical & physical information available upon request

Samples available. See website for ordering information.

PAD LAYOUT

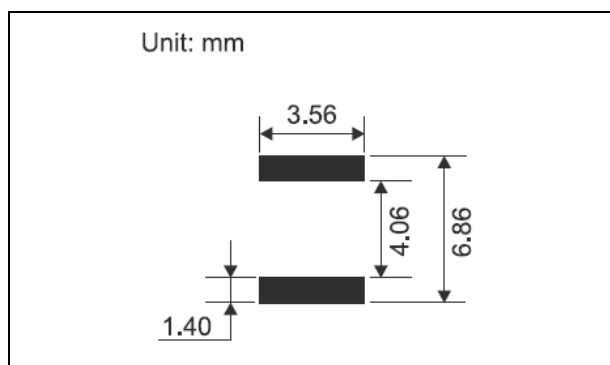

SPECIFICATIONS


Parts are available in $\pm 20\%$ tolerance only.

GVDS1608CE Please specify "F" for RoHS compliant

Part Number	Inductance ($\mu\text{H} \pm 20\%$)	L Test Freq. (kHz)	Q Fact. Min.	Q Test Freq. (kHz)	DCR Max. (Ω)	IDC Max. (A)	SRF Typ. (MHz)
GVDS1608C_-102	1.0	100	30	200	.040	3.0	250
GVDS1608C_-152	1.5	100	30	200	.045	2.8	125
GVDS1608C_-222	2.2	100	40	200	.050	1.8	120
GVDS1608C_-332	3.3	100	40	200	.055	1.6	120
GVDS1608C_-472	4.7	100	40	200	.060	1.4	105
GVDS1608C_-682	6.8	100	40	200	.065	1.2	50
GVDS1608C_-103	10	100	40	200	.075	1.0	38
GVDS1608C_-153	15	100	40	100	.090	0.8	33
GVDS1608C_-223	22	100	40	100	.110	0.7	25
GVDS1608C_-333	33	100	40	100	.190	0.6	20
GVDS1608C_-473	47	100	40	100	.230	0.5	20
GVDS1608C_-683	68	100	40	100	.290	0.4	15
GVDS1608C_-104	100	100	40	100	.480	0.3	10
GVDS1608C_-154	150	100	40	100	.590	.26	9
GVDS1608C_-224	220	100	40	100	.770	.22	6
GVDS1608C_-334	330	100	40	100	1.4	.20	5
GVDS1608C_-474	470	100	40	100	1.8	.19	4
GVDS1608C_-684	680	100	40	100	2.2	.18	3
GVDS1608C_-105	1000	100	40	100	3.4	.15	2
GVDS1608C_-155	1500	100	50	100	4.2	.12	2
GVDS1608C_-225	2200	100	50	100	8.5	.10	2
GVDS1608C_-335	3300	100	50	100	11.0	.08	1
GVDS1608C_-475	4700	100	50	100	13.9	.06	1
GVDS1608C_-685	6800	100	50	100	25.0	.04	1
GVDS1608C_-825	8200	100	50	100	30.5	.02	1
GVDS1608C_-106	10000	100	50	100	32.8	.02	0.8

PHYSICAL DIMENSIONS

Size	A	B	C	D	E	F	G
	Max.	Max.	Max.				
mm	6.6	4.45	2.92	1.02	1.27	4.32	3.05
inches	0.26	0.18	0.12	0.04	0.05	0.17	0.1

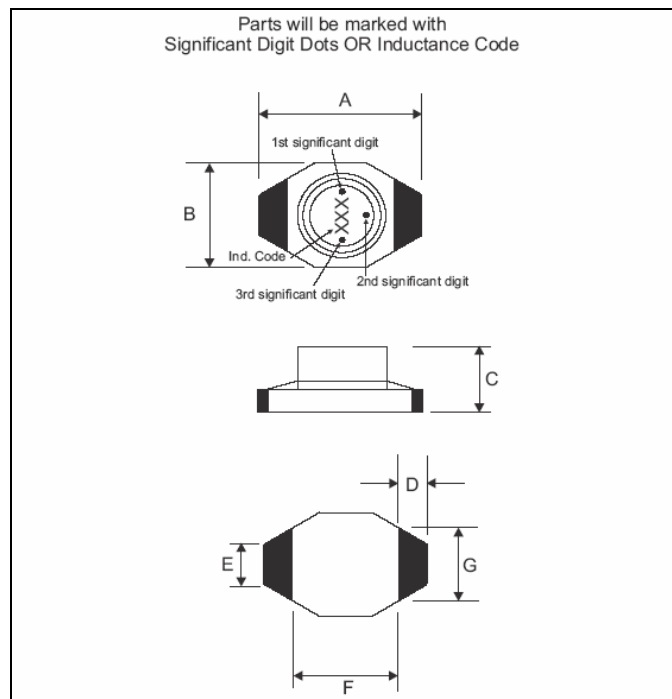

Ginvanix Electronics Corp.

180, Minsheng St., 303, Hukou, Hsinchu, Taiwan
 Tel: +886-3-5999899; Fax: +886-3-5901484; info@ginvanix.com