


Power Line Chokes - Axial

ginvanix.com

GVH9 Series

From 3.35 μH to 1,000 μH

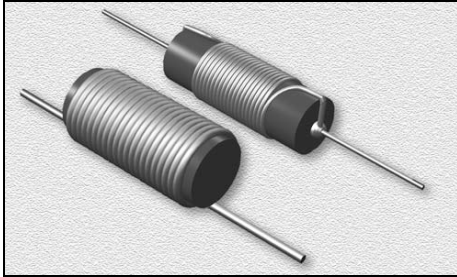

SPECIFICATIONS


Part numbers indicate available tolerance.

M = $\pm 20\%$

GVH9E Please specify "F" for RoHS compliant

Part Number	Inductance (μH)	L Test Freq. (kHz)	DCR Max. (W)	Rated Curr. Max. (A)	Coil Dia. (Inch)	Body Length Max. (Inch)	Lead Wire Size (AWG)	Lead Length Approx. (Inch)	Refer to Figure #	Core Material
GVH9_-3R3M	3.35	1.0	.01	20	.60	1.25	12	1.1	A	Iron
GVH9_-4R9M	4.9	1.0	.01	15	.60	1.25	14	1.1	A	Iron
GVH9_-8R8M	8.8	1.0	.02	10	.56	1.25	16	1.1	A	Iron
GVH9_-4R0M	4.0	1.0	.01	8.0	.38	1.25	20	1.1	B	Ferrite
GVH9_-400M	40	1.0	.08	3.0	.31	1.25	20	1.1	C	Ferrite
GVH9_-680M	68	1.0	.05	5.0	.56	1.25	20	1.1	D	Ferrite
GVH9_-101M	100	1.0	.21	2.0	.38	1.25	20	1.1	E	Ferrite
GVH9_-125M	125	1.0	.08	3.5	.50	1.25	20	1.1	D	Ferrite
GVH9_-251M	250	1.0	.17	2.5	.44	1.25	20	1.1	D	Ferrite
GVH9_-501M	500	1.0	.26	2.0	.56	1.25	20	1.1	D	Ferrite
GVH9_-102M	1000	1.0	.55	1.0	.50	1.25	20	1.1	D	Ferrite

PHISICAL DIMENSIONS

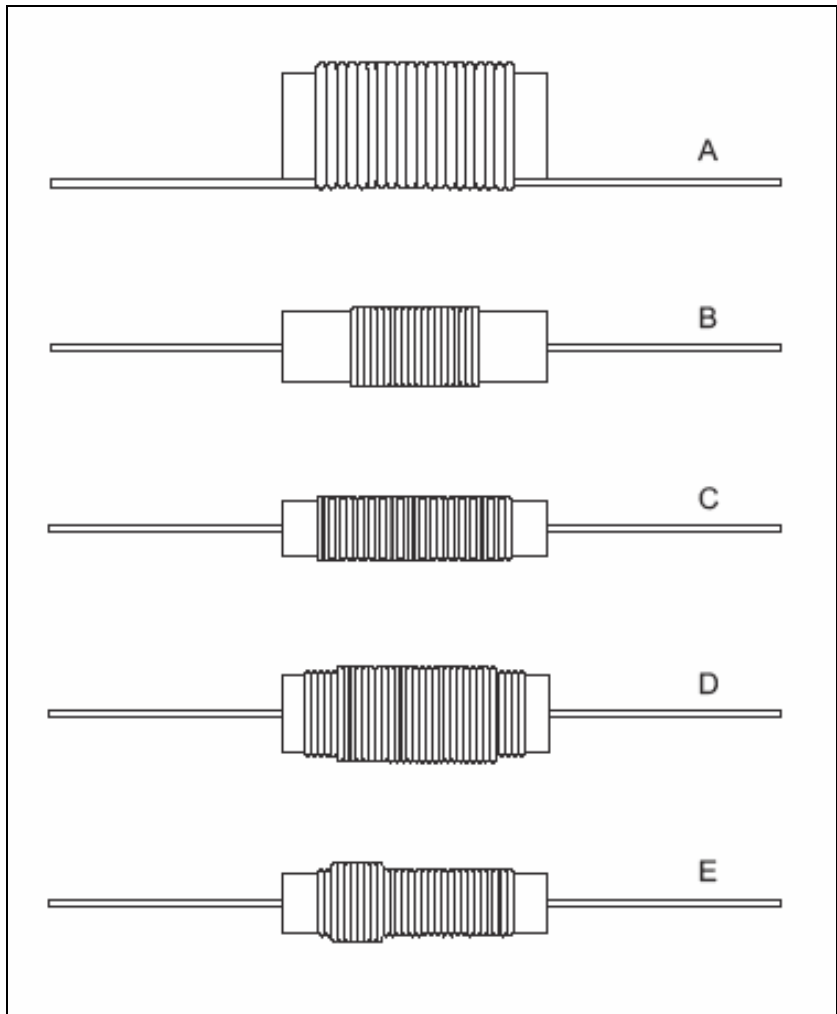

CHARACTERISTICS

Description: Axial leaded power line inductor

Applications: Used in switching regulators, SCR and Triac controls, RFI suppression and filters. High current applications

Operating Temperature: -55°C to +125°C (no load) -55°C to +75°C (at full rated current)

Inductance Tolerance: $\pm 20\%$

Testing: Inductance is tested on an HP4284A at 1.0 kHz

Packaged: Bulk pack

Inductance: Measured at 1.0 volt with zero DC Current

Rated Current: Based on the inductance change within 20% of initial value and temperature rise less than 30°C within coil body

Miscellaneous: RoHS Compliant available.

Other values are available

Additional Information: Additional electrical & physical

information available upon request

Samples available. See website for ordering information.



Ginvanix Electronics Corp.

180, Minsheng St., 303, Hukou, Hsinchu, Taiwan
Tel: +886-3-5999899; Fax: +886-3-5901484; info@ginvanix.com