


GVTF0603 Series

From 1.0 nH to 68 nH

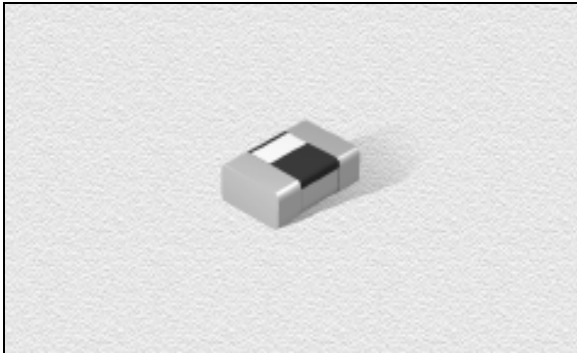

SPECIFICATIONS

Please specify tolerance code when ordering.
 GVTF0603-1N0_ ← B = ±0.1nH, C = ±0.2nH, G = ±2%
 * = B or C only

Part Number	Inductance (nH)	L Test Freq. (MHz)	Q Min.	Q Test Freq. (MHz)	DCR Max. (Ω)	Rated DC Max. (mA)	SRF Min. (GHz)
GVTF0603-1N0_*	1.0	300	17	300	0.2	800	6
GVTF0603-1N2_*	1.2	300	17	300	0.2	800	6
GVTF0603-1N5_*	1.5	300	17	300	0.2	800	6
GVTF0603-1N8_*	1.8	300	17	300	0.2	300	6
GVTF0603-2N2_*	2.2	300	17	300	0.2	300	6
GVTF0603-2N7_*	2.7	300	17	300	0.2	300	6
GVTF0603-3N3_*	3.3	300	17	300	0.2	300	6
GVTF0603-3N9_*	3.9	300	17	300	0.2	300	6
GVTF0603-4N7_*	4.7	300	17	300	0.2	300	5
GVTF0603-5N6_*	5.6	300	17	300	0.5	300	5
GVTF0603-6N8_*	6.8	300	17	300	0.5	300	5
GVTF0603-8N2_*	8.2	300	17	300	0.5	300	4
GVTF0603-10NG	10	300	15	300	1.0	300	4
GVTF0603-12NG	12	300	15	300	1.0	300	3
GVTF0603-15NG	15	300	15	300	1.0	300	3
GVTF0603-18NG	18	300	15	300	2.0	300	2
GVTF0603-22NG	22	300	15	300	2.0	250	2
GVTF0603-27NG	27	300	15	300	2.0	250	2
GVTF0603-33NG	33	300	15	300	2.0	250	1.5
GVTF0603-39NG	39	300	15	300	3.0	200	1.5
GVTF0603-47NG	47	300	15	300	3.0	200	1.5
GVTF0603-56NG	56	300	15	300	5.0	150	1
GVTF0603-68NG	68	300	15	300	5.0	150	1

CHARACTERISTICS

Description: SMD thin film chip inductors

Applications: Cellular Telephone, pagers, GPS products, wireless LAN and other communication appliances, VCO, TCXO circuit and RF Transceiver Module

Operating Temperature: -40°C to +85°C

Inductance Tolerance: ±0.1nH, ±0.2nH & ±2%

Testing: Tested on a HP4287A at 300 MHz

Packaging: Tape & Reel

Marking: Reels are marked with inductance code and tolerance

Additional Information: Additional electrical & physical information available upon request

Samples available. See website for ordering information.

PHYSICAL DIMENSIONS

Size	A	B	C	D
mm	1.6 ± 0.1	0.8 ± 0.1	0.45 ± 0.1	0.3 ± 0.2
inches	0.06 ± 0.004	0.03 ± 0.004	0.02 ± 0.004	0.01 ± 0.008

