


GVH7 Series

From 3.9 μ H to 18,000 μ H

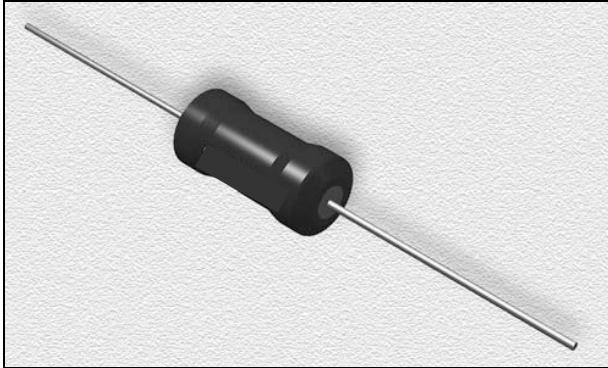

CHARACTERISTICS

- Description:** Axial leaded power line inductor (UL sleeved)
- Applications:** Used in switching regulators, power amplifiers, power supplies, SCR and Triac controls, speaker crossover networks, RFI suppression and filters. Various applications
- Operating Temperature:** -55°C to +100°C
- Inductance Tolerance:** $\pm 10\%$
- Testing:** Inductance is tested on an HP4284A at 1.0 kHz
- Packaging:** Bulk pack standard, Tape & Reel available. Lead length (dimension C) is 20mm max. for parts packaged tape & reel.
- Marking:** Coils are sleeved in heat resistant polyolefin and labeled with the part number
- Miscellaneous:** **RoHS Compliant available.** Higher current parts available.
- Saturation Current:** Lowers inductance by 10%
- Bobbin:** High saturation, allows for high inductance with low DC resistance
- Additional Information:** Additional electrical & physical information available upon request
- Samples available. See website for ordering information.**

SPECIFICATIONS

Part numbers indicate tolerance available..

K = $\pm 10\%$

GVH7E Please specify "F" for RoHS compliant

Part Number	Inductance (μ H)	L Test Freq. (kHz)	SRF Min. (MHz)	DCR Max. (Ω)	Saturation DC (A)	Rated AC (A)
GVH7_-3R9K	3.9	1.0	38	.02	7.3	1.3
GVH7_-4R7K	4.7	1.0	26	.02	6.3	1.3
GVH7_-5R6K	5.6	1.0	25	.02	5.6	1.3
GVH7_-6R8K	6.8	1.0	25	.03	5.3	1.3
GVH7_-8R2K	8.2	1.0	22	.03	4.5	1.3
GVH7_-100K	10	1.0	17	.03	4.1	1.3
GVH7_-120K	12	1.0	16	.04	3.6	1.3
GVH7_-150K	15	1.0	12	.04	3.3	1.3
GVH7_-180K	18	1.0	11	.04	3.0	1.3
GVH7_-220K	22	1.0	10	.05	2.7	1.3
GVH7_-270K	27	1.0	7.0	.06	2.5	1.3
GVH7_-330K	33	1.0	7.0	.08	2.2	1.0
GVH7_-390K	39	1.0	7.0	.09	2.0	.80
GVH7_-470K	47	1.0	6.0	.11	1.8	.80
GVH7_-560K	56	1.0	6.0	.13	1.7	.80
GVH7_-680K	68	1.0	7.0	.14	1.5	.80
GVH7_-820K	82	1.0	4.0	.15	1.4	.80
GVH7_-101K	100	1.0	3.0	.21	1.2	.63
GVH7_-121K	120	1.0	3.0	.28	1.1	.51
GVH7_-151K	150	1.0	3.0	.34	1.0	.51
GVH7_-181K	180	1.0	3.0	.36	.95	.51
GVH7_-221K	220	1.0	3.0	.43	.86	.51
GVH7_-271K	270	1.0	2.0	.56	.77	.40
GVH7_-331K	330	1.0	2.0	.67	.70	.40
GVH7_-391K	390	1.0	2.0	.77	.64	.40
GVH7_-471K	470	1.0	2.0	1.2	.59	.32
GVH7_-561K	560	1.0	1.0	1.3	.54	.32
GVH7_-681K	680	1.0	1.0	1.6	.49	.25
GVH7_-821K	820	1.0	1.0	2.0	.44	.20
GVH7_-102K	1000	1.0	1.0	2.3	.40	.20
GVH7_-122K	1200	1.0	1.0	2.7	.35	.20
GVH7_-152K	1500	1.0	.85	3.5	.33	.16
GVH7_-182K	1800	1.0	.67	4.0	.29	.16
GVH7_-222K	2200	1.0	.65	4.5	.27	.16
GVH7_-272K	2700	1.0	.65	5.4	.24	.13
GVH7_-332K	3300	1.0	.60	6.6	.22	.13
GVH7_-392K	3900	1.0	.60	8.6	.20	.10
GVH7_-472K	4700	1.0	.50	9.7	.18	.10
GVH7_-562K	5600	1.0	.60	14	.16	.08
GVH7_-682K	6800	1.0	.40	16	.15	.08
GVH7_-822K	8200	1.0	.35	21	.13	.07
GVH7_-103K	10000	1.0	.30	26	.12	.05
GVH7_-123K	12000	1.0	.25	30	.11	.05
GVH7_-153K	15000	1.0	.30	43	.10	.04
GVH7_-183K	18000	1.0	.30	48	.09	.04

PHYSICAL DIMENSIONS

Size	A	B	C	20 AWG
	Max.	Max.	Typ.	Nom.
mm	15.3	6.85	29.2	0.813
inches	0.6	0.27	1.15	0.319

