


Power Line Chokes - Axial

ginvanix.com

GVH8 Series

From 3.9 μ H to 18,000 μ H

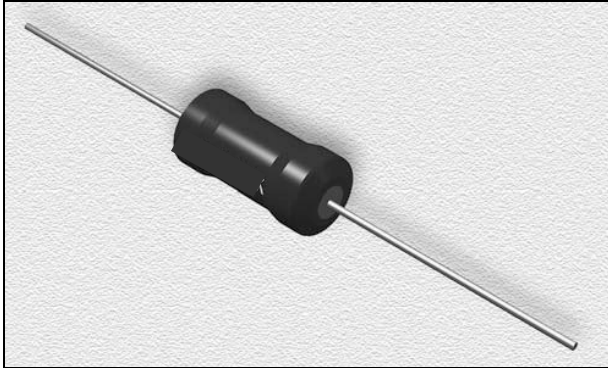

CHARACTERISTICS

Description: Axial leaded power line inductor (UL sleeved)

Applications: Used in switching regulators, power amplifiers, power supplies, SCR and Triac controls, speaker crossover networks, RFI suppression and filters. Various applications

Operating Temperature: -55°C to +100°C

Inductance Tolerance: $\pm 10\%$

Testing: Inductance is tested on an HP4284A at 1.0 kHz

Packaging: Bulk pack standard, Tape & Reel available. Lead length (dimension C) is 15mm max. for parts packaged tape & reel.

Marking: Coils are sleeved in heat resistant polyolefin and labeled with the part number

Saturation Current: Lowers inductance by 5%

Bobbin: High saturation, allows for high inductance with low DC resistance

Miscellaneous: RoHS Compliant available. Higher current parts available

Additional Information: Additional electrical & physical information available upon request

Samples available. See website for ordering information.

SPECIFICATIONS

Part numbers indicate tolerance available..


K = $\pm 10\%$

GVH8E Please specify "F" for RoHS compliant

Part Number	Inductance (μ H)	L Test Freq. (kHz)	SRF Min. (MHz)	DCR Max. (Ω)	Saturation DC (A)	Rated AC (A)
GVH8_-3R9K	3.9	1.0	34	.01	15	4.0
GVH8_-4R7K	4.7	1.0	31	.01	14	4.0
GVH8_-5R6K	5.6	1.0	29	.01	12	4.0
GVH8_-6R8K	6.8	1.0	26	.01	11	4.0
GVH8_-8R2K	8.2	1.0	23	.01	9.9	4.0
GVH8_-100K	10	1.0	20	.02	8.7	4.0
GVH8_-120K	12	1.0	17	.02	8.2	4.0
GVH8_-150K	15	1.0	14	.02	7.3	4.0
GVH8_-180K	18	1.0	11	.02	6.6	4.0
GVH8_-220K	22	1.0	10	.03	6.1	4.0
GVH8_-270K	27	1.0	9.0	.03	5.3	4.0
GVH8_-330K	33	1.0	9.0	.03	4.8	4.0
GVH8_-390K	39	1.0	8.0	.03	4.3	4.0
GVH8_-470K	47	1.0	7.0	.04	4.0	4.0
GVH8_-560K	56	1.0	6.0	.04	3.6	3.2
GVH8_-680K	68	1.0	5.0	.05	3.3	2.5
GVH8_-820K	82	1.0	4.0	.06	3.1	2.0
GVH8_-101K	100	1.0	3.0	.09	2.8	1.6
GVH8_-121K	120	1.0	3.0	.11	2.5	1.6
GVH8_-151K	150	1.0	3.0	.13	2.2	1.6
GVH8_-181K	180	1.0	2.0	.15	2.0	1.6
GVH8_-221K	220	1.0	2.0	.16	1.9	1.6
GVH8_-271K	270	1.0	2.0	.21	1.6	1.6
GVH8_-331K	330	1.0	2.0	.21	1.5	1.6
GVH8_-391K	390	1.0	2.0	.28	1.4	1.6
GVH8_-471K	470	1.0	1.0	.38	1.2	1.2
GVH8_-561K	560	1.0	1.0	.42	1.2	1.0
GVH8_-681K	680	1.0	1.0	.55	1.0	1.0
GVH8_-821K	820	1.0	1.0	.66	.97	.80
GVH8_-102K	1000	1.0	1.0	.84	.87	.80
GVH8_-122K	1200	1.0	1.0	1.0	.79	.60
GVH8_-152K	1500	1.0	.75	1.2	.70	.60
GVH8_-182K	1800	1.0	.72	1.6	.64	.60
GVH8_-222K	2200	1.0	.70	2.0	.58	.50
GVH8_-272K	2700	1.0	.65	2.1	.53	.40
GVH8_-332K	3300	1.0	.60	2.6	.47	.40
GVH8_-392K	3900	1.0	.55	2.8	.43	.40
GVH8_-472K	4700	1.0	.50	3.2	.39	.40
GVH8_-562K	5600	1.0	.40	3.9	.36	.32
GVH8_-682K	6800	1.0	.35	5.7	.32	.25
GVH8_-822K	8200	1.0	.30	6.3	.29	.25
GVH8_-103K	10000	1.0	.30	7.3	.26	.25
GVH8_-123K	12000	1.0	.30	10	.26	.16
GVH8_-153K	15000	1.0	.30	11	.23	.16
GVH8_-183K	18000	1.0	.20	15	.21	.13
GVH8_-223K	22000	1.0	.20	17	.19	.13
GVH8_-273K	27000	1.0	.15	19	.17	.13
GVH8_-333K	33000	1.0	.15	27	.15	.10
GVH8_-393K	39000	1.0	.15	29	.14	.10
GVH8_-473K	47000	1.0	.10	32	.13	.10
GVH8_-563K	56000	1.0	.10	43	.12	.08
GVH8_-683K	68000	1.0	.10	47	.11	.08
GVH8_-823K	82000	1.0	.10	65	.10	.07
GVH8_-104K	100000	1.0	.10	72	.10	.07

PHYSICAL DIMENSIONS

Size	A	B	C	20 AWG
	Max.	Max.	Typ.	Nom.
mm	22.8	11.4	29.2	0.813
inches	0.9	0.45	1.15	0.03

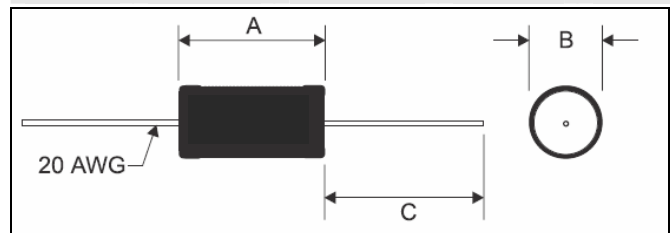

Ginvanix Electronics Corp.

180, Minsheng St., 303, Hukou, Hsinchu, Taiwan
Tel: +886-3-5999899; Fax: +886-3-5901484; info@ginvanix.com